

AD 813883

TECHNICAL REPORT  
67-45-CM


**DEVELOPMENT, FABRICATION  
AND PROOFTESTING OF OPTIMUM FOOT  
PROTECTION AGAINST ANTIPERSONNEL  
MINES USING A SUPPLEMENTARY  
DEVICE**

**Reproduced From  
Best Available Copy**


by  
E. S. Fujinaka and J. L. MacDonald

IIT Research Institute  
Technology Center  
Chicago, Illinois

Contract No. DA19-129 QMC-379(N)



December 1966

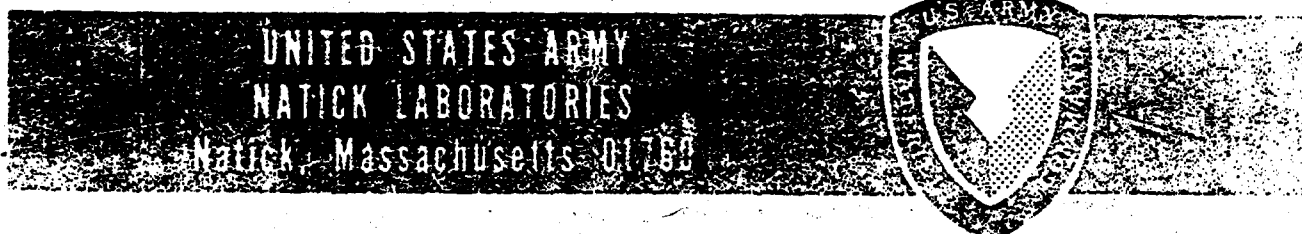

Clothing & Organic Materials Division

TS-148

**Best Available Copy**

The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

Citation of trade names in this report does not constitute an official indorsement or approval of the use of such items.

Each transmittal of this document outside the agencies of the U. S. Government must have prior approval of the Director, Clothing and Organic Materials Division, U. S. Army Natick Laboratories, Natick, Mass.

#### DISPOSITION INSTRUCTIONS

Destroy this report when no longer needed. Do not return it to the originator.

The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

Citation of trade names in this report does not constitute an official indorsement or approval of the use of such items.

Each transmittal of this document outside the agencies of the U. S. Government must have prior approval of the Director, Clothing and Organic Materials Division, U. S. Army Natick Laboratories, Natick, Mass.

#### DISPOSITION INSTRUCTIONS

Destroy this report when no longer needed. Do not return it to the originator.

Each transmittal of this document  
outside the agencies of the U.S.  
Government must have prior approval  
of the Director, Clothing and  
Organic Materials Division, U. S.  
Army Natick Laboratories, Natick, Mass.

AD \_\_\_\_\_

TECHNICAL REPORT

67-45-QM

DEVELOPMENT, FABRICATION AND PROOFTESTING  
OF OPTIMUM FOOT PROTECTION AGAINST ANTIPERSONNEL  
MINES USING A SUPPLEMENTARY DEVICE

by

E. S. Fujinaka

J. L. MacDonald

IIT Research Institute  
Technology Center  
Chicago, Illinois 60616

December 1966

Project Reference:  
1K6-43303-D547

Series: TS-149

Clothing & Organic Materials Division  
U. S. ARMY NATICK LABORATORIES  
Natick, Massachusetts 01760

## FOREWORD

This report covers Phase II of the research program concerned with the fabrication of blast evaluation prototypes and the preliminary aspects of proof testing these prototypes. The period covered is from 1 February 1966 through 30 July 1966.

This report was prepared by ITR Research Institute under Contract No. 19-129-QMC-319(K) under the leadership of E. S. Fujinaka and J. L. Macdonald. Personnel from the Experimental Operations Section of ITRRI contributed to the fabrication portion of the program. The contract was initiated under Project No. 1K6-43303-D547 and was administered under the direction of the Clothing & Organic Materials Division of the U. S. Army Natick Laboratories, with Mr. Douglas Swain and Mr. Edward W. Gordon acting as Project Officers.

S. J. Kennedy  
Director  
Clothing & Organic Materials Division

APPROVED:

DALE H. SIELING, Ph.D.  
Scientific Director

W. M. MANTZ,  
Brigadier General, U.S.A.  
Commanding

## CONTENTS

	<u>Page</u>
List of Figures and Tables	v
Abstract	vi
Introduction	i
PART I. REVIEW OF THE ANALYTICAL AND EXPERIMENTAL DATA USED IN THE DESIGN OF THE BLAST PROTECTIVE SUPPLEMENTARY DEVICE	i
PART II. FABRICATION OF FOOTWEAR	6
A. Concept A Fabrication Details	6
B. Concept B Fabrication Details	6
PART III. PRELIMINARY PROOFTESTING CONSIDERATIONS	15
References	19

### LIST OF FIGURES

		<u>Page</u>
1	Aquarium Water Bath Experimental Configuration	3
2	A Section View of a Typical Protective Boot/Sabot Combined System	4
3	Concept "A" Sabot Prototype Shown Mounted on a DMS Protective Combat Boot	7
4	Concept "B" Sabot Prototype Shown Mounted on a DMS Protective Combat Boot	8
5	Pair of Concept "A" Sabot Elastomers with Molded-in-Place Shanks Shown Less Rubber Overshoe	9
6	Pair of Concept "B" Sabot Systems Complete with Upper Reinforcements and Shanks	10
7	Mold for Concept "A" Sabot Elastomer (Left Foot)	11
8	Mold for Concept "B" Sabot Elastomer (Left Foot)	12
9	Sabot Shank Used for Both Concepts A and B	13
10	Aluminum Alloy 2024-T3 Sabot Shank	14
11	Sabot Upper Reinforcement (Left Foot) Material: Aluminum Alloy 2024-O Heat-Treated to 2024-T4 after Bending	16
12	Band for Sabot Upper Reinforcement, Aluminum Alloy 2024-T3	17

### LIST OF TABLES

I	Tabulated Data on Blast Injury to Foot with a Sabot Supplementary Protective Device	5
---	---	---

# ABSTRACT

This report covers Phase II of a program to develop a supplementary item of protective footwear to be used in conjunction with a previously developed protective combat boot. It was directed toward fabrication of test prototypes for blast evaluation. The supplementary devices were of two types, Concept A and Concept B, both using an identical solid aluminum shank. Concept B incorporated a system of reinforcement for the upper portion of the foot.

A discussion of preliminary prooftesting considerations is presented. This discussion includes the recommendation of test personnel, the quantity of tests, and the protective footwear to be used during tests.



DEVELOPMENT, FABRICATION, AND PROOFTESTING  
OF OPTIMUM FOOT PROTECTION AGAINST ANTIPERSONNEL  
MINES USING A SUPPLEMENTARY DEVICE

Introduction

A variety of techniques for providing varying degrees of protection against antipersonnel (AP) land mines are available. It is possible to reinforce the combat boot or provide some form of supplementary protection. This report covers the fabrication and preliminary aspects of the prooftesting of supplementary devices which are intended to be used in conjunction with a previously developed protective combat boot. (2) The results of prooftesting the supplementary devices will be supplied later as a supplement to this report.

The standard stitched or direct molded sole (DMS) combat boot is not effective in preventing an amputation of a foot exposed to the blast effects of a small AP land mine (such as the U. S. Army M-14 which contains one ounce of tetryl). Modifying the boot by means of a protective shank can salvage about 27 percent of the casualties from amputation, and reinforcing the counter area of the boot upper can increase the salvage from amputation to about 65 percent. (2)

The supplementary devices are intended to increase the level of protection provided by the protective combat boot from the 27 to 65 percent possible salvage to at least 90 percent possible salvage. The factors involved in the design of the supplementary devices are discussed in detail in the Phase I Final Report under this contract (1) and are briefly reviewed below.

PART I. REVIEW OF THE ANALYTICAL AND EXPERIMENTAL DATA USED  
IN THE DESIGN OF THE BLAST PROTECTIVE SUPPLEMENTARY  
DEVICES

Phase I of this program included the theoretical and experimental development of the concepts which were eventually fabricated in a quantity sufficient for blast evaluation. These data are fully covered in IITRI Report E6029-5. (1)

To summarize briefly, the impulsive load generated by the land mine must be reduced to a tolerable level by a supplementary device used in conjunction with a protective boot. A tolerable level is defined by the 90 percent possible salvage criteria. In this context, possible salvage refers to a level of injury which an experienced observer would regard as not likely to require an amputation of the foot. A medical judgment of this sort is somewhat subjective; however, several independent evaluations of the same specimen can be used to arrive at an average evaluation.

The Phase I effort was primarily devoted to the study of the system shown in Figure 1. A water bath receives the impulsive load which would normally be transmitted to the foot. Figure 2 indicates the analogous system, including a human foot. Although a considerable physical difference exists between the two systems, the matching soft tissue-water impedance and the extremely short duration of the shock portion of the loading wave had made the water bath an evaluation tool of considerable significance to this program.

Based on experiments with the water bath system of Figure 1, it was determined that the unit area impulse would be less than 0.4 psi-sec for any of the sabot shanks which were considered and, likewise, that the peak pressure would be limited to less than 2,000 psi. It was also noted that the external wedge shape which is directly exposed to the land mine would limit the gross impulse input to about 5.7 pound-seconds. A comparison of these data to the estimated damage threshold data for a human foot indicated that any of the supplementary device systems which were evaluated are capable of achieving a relatively high level of protection.

The sabot shanks provided a level of protection which appeared to be related to their mass without regard to internal construction or material parameters. The heavier sabot shanks resulted in lower values for peak pressure and unit area impulse. The significance of this fact is that there is no additional foot-saving advantage to be gained through a multiple-layered, impedance-mismatched sabot shank, or through the use of crushable materials or configurations within the sabot shank; a sufficient number of impedance mismatch layers is contained within the boot protective shank for this purpose.

The series of 18 cadaver experiments with a configuration generally similar to Figure 2 resulted in only one case of damage sufficient to rupture the skin. This latter case involved the use of a Lexan polycarbonate plastic sabot shank. The number of variables involved in these experiments make it difficult to predict the precise level of protection which any particular system may provide, but the range of damage indicates that almost any of the protective systems has a good chance of meeting the required 90 percent possible salvage level.

A full description of these experiments is included in the Phase I report (1) and the results are reported here in Table I. All combinations of sabot variables performed equally well on a range of cadaver legs for this small test series. Therefore, although more data are desirable, the selection of any particular combination should be based upon comfort or economic consideration.

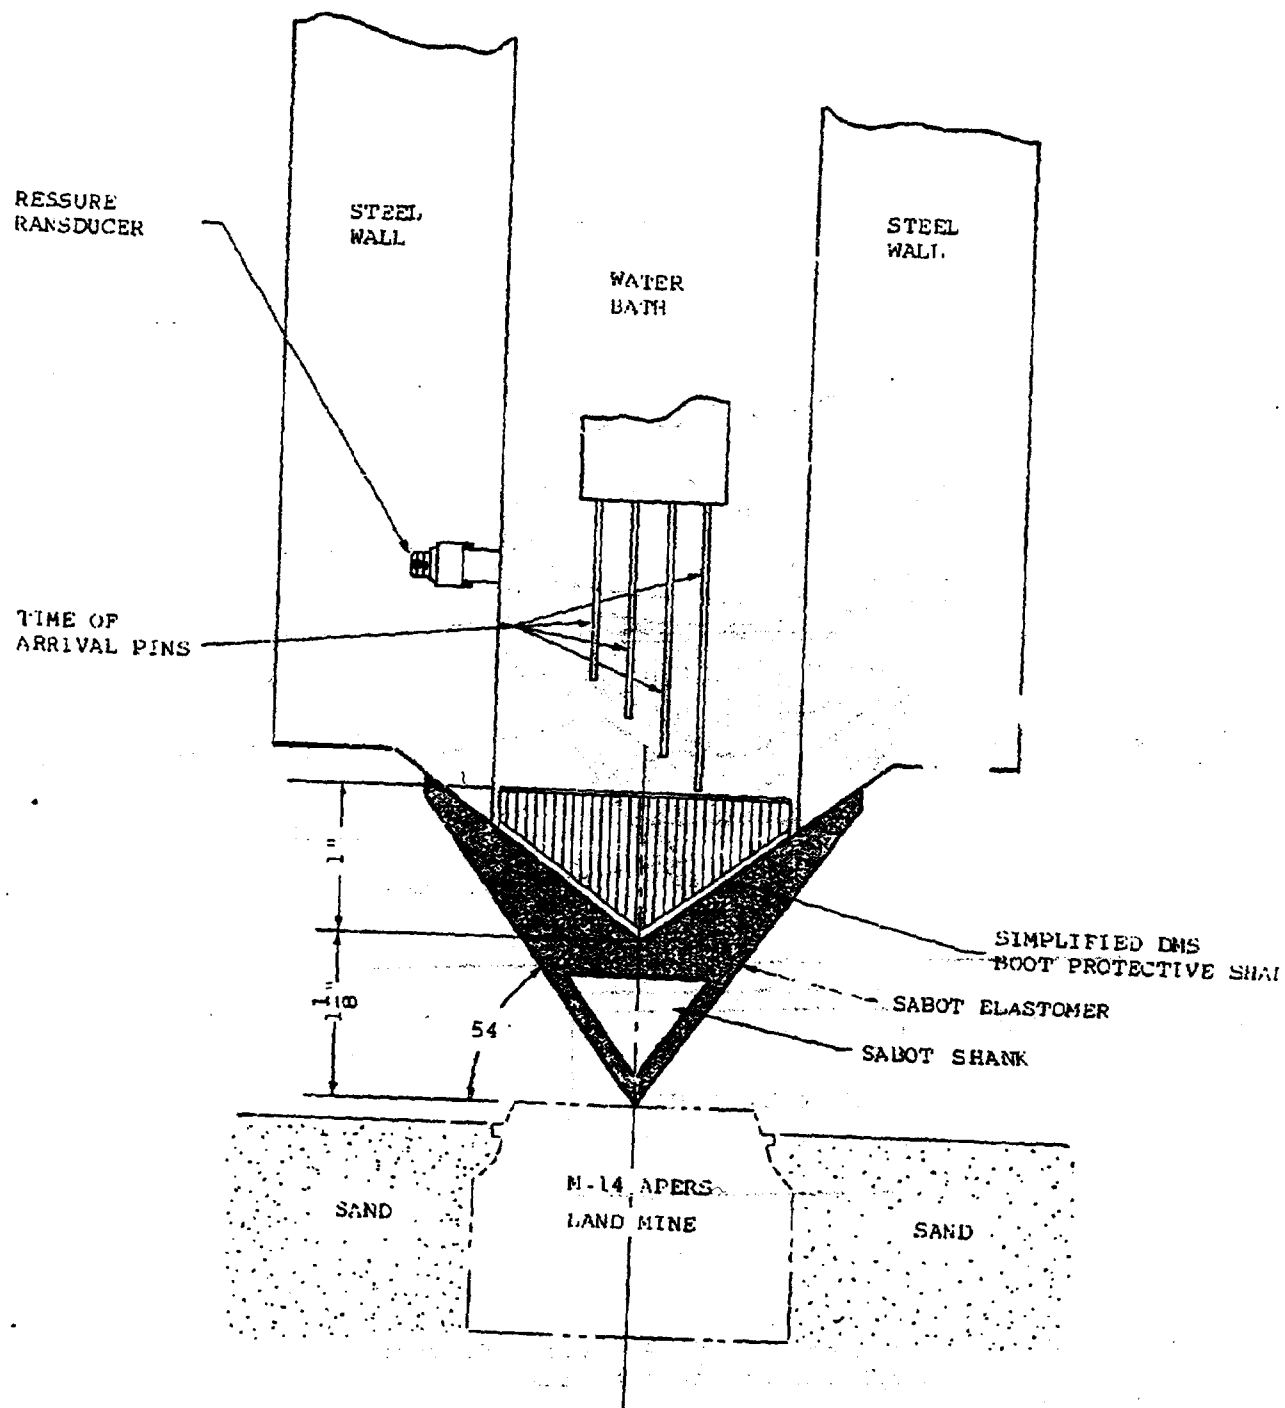


Figure 1 Aquarium Water Bath Experimental Configuration

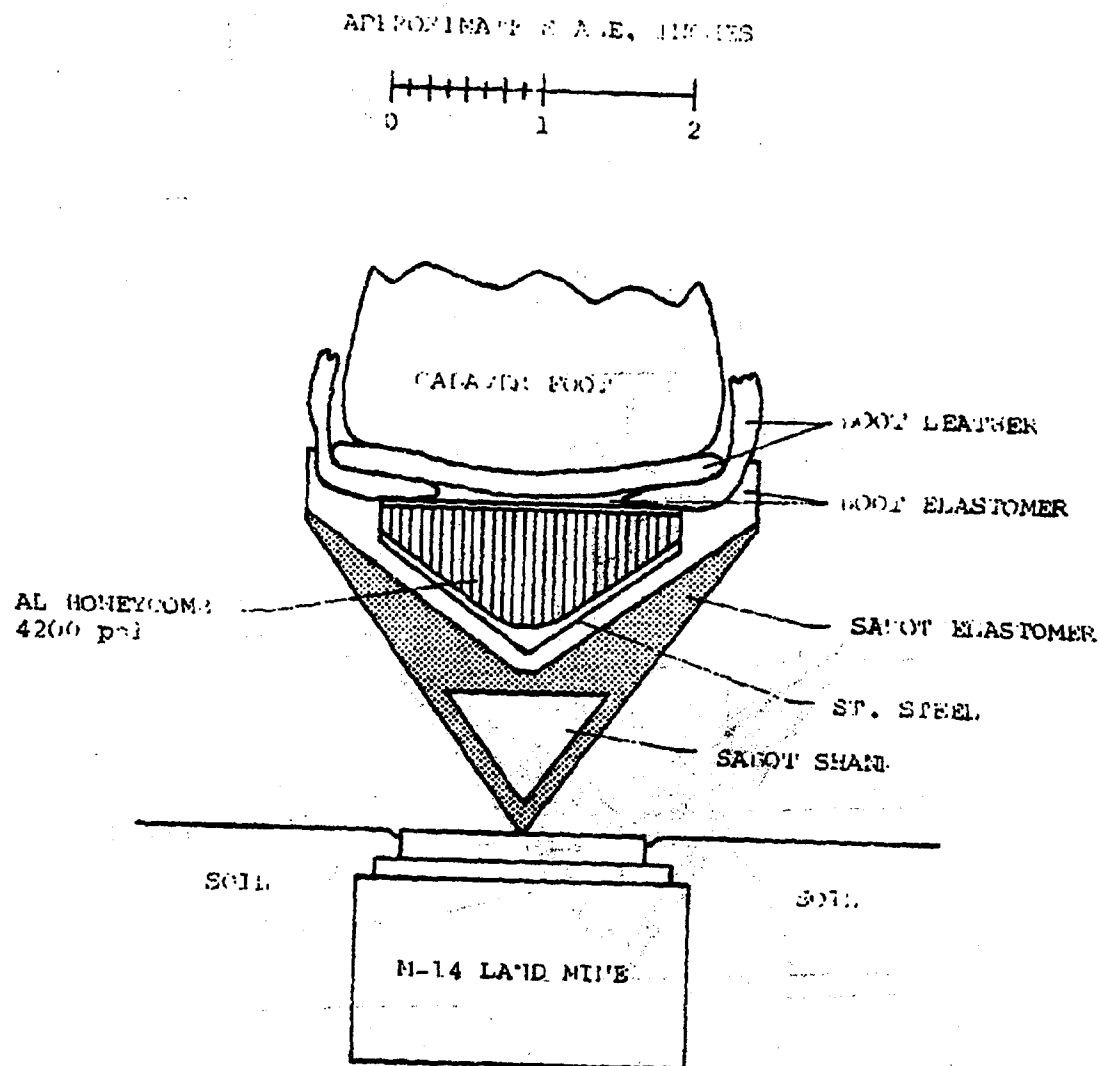


Figure 2 A Section View Of A Typical Protective Boot/Sabot Combined System

19-00000-1

CAGE (7-10)	LTC VEHICLES		COUNTER	DAILY VEHICLES		SOP PRICE SOURCE	ZONE FACTORY
	TYPE	DETAILS		ALUMINUM UPPER RESTRAINT POINT	BRASS MATERIAL		
1182	Two PC	Quincy	None	Aluminum	Aluminum	None	Chrysler
8	"	"	"	"	Lower	"	"
9	"	"	"	"	Turkish	"	"
10	Two PC	Quincy	None	Aluminum	Aluminum	None	"
81	One PC	"	Leather	Aluminum	Aluminum	"	"
82	"	"	"	Leather	Leather	"	"
83	Two PC	"	"	Aluminum	Aluminum	"	"
87	"	"	"	Leather	Leather	"	"
88	"	"	"	Aluminum	Aluminum	"	"
89	One PC	None	None	Aluminum	Aluminum	"	"
90	"	"	"	Aluminum	Aluminum	"	"
91	"	"	"	Aluminum	Aluminum	"	"
92	"	"	"	Aluminum	Aluminum	"	"
93	"	"	"	Aluminum	Aluminum	"	"
94	"	"	"	Aluminum	Aluminum	"	"
95	"	"	"	Aluminum	Aluminum	"	"
96	"	"	"	Aluminum	Aluminum	"	"
97	"	"	"	Aluminum	Aluminum	"	"

## EXPLANATION OF SYMBOLS

Self Test: Dental Cover

NOV - 406

5 Act-  
Saves - date: with. an 800 1000

407201050

Section 112(a)(2)(C)

சென்னை, 19.05.2019

Modular, faceted, hex. level, layer  
four pieces around constitution of a  
relative to small area

Light reflecting (100% diff. reflectance)

0-971 - 1108726:P ON

3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842

CONFIDENTIAL  
DO NOT WRITE IN THESE SPACES

interpretation of the following cases:  
 Appeals: Reports. Any other cases of

1305-170 711 30 17748-0 01 PERMUT 4.  
11 170000 17748-0 01 17748-0 01 17748-0 01

6

## PART II. FABRICATION OF FOOTWEAR

The fabrication of 10 pairs of each of two supplementary device concepts was a major portion of the Phase II effort. Figures 3 and 4 show the two concepts mounted on boots. Figures 5 and 6 show the concepts in pairs. Note that concept A is shown in Figure 5 without the rubber overshoe attaching system. The molds which were used to cast the urethane rubber are shown in Figures 7 and 8. The protective sabot shank is shown in Figures 9 and 10.

The urethane elastomer used for these models is furnished by Dik-O-Seal of Chicago, Illinois, and is designated ABRASHUN 5055. The material has a nominal durometer of 55 shore A and is somewhat softer than that used previously for the initial samples. Some difficulty noted in molding this softer material resulted in air voids near the edges and some internal bubbles, but these should not affect the overall blast protective qualities of the sabot system.

### A. Concept A Fabrication Details

The solid aluminum shank shown in Figures 9 and 10 was molded directly into the urethane casting. This casting was then adhesive bonded to a rubber overshoe by an overlapping strip of 1/16-inch thick neoprene rubber which was contoured to fit. The adhesive used was Loctite 404 which contains a Methyl-2-Cyanoacrylate resin and is similar to Eastman 910.

The rubber overshoe itself is a commercially available item designated by the manufacturer\* as Sandal, Extra Large, 1100 Black. The overshoe was shortened slightly and the bottom was removed so that the sabot as shown in Figure 5 is mounted directly against the bottom of the combat boot and the overshoe is used only to retain it in place.

### B. Concept B Fabrication Details

Concept B was also fabricated with the aluminum shank molded in place. The upper part of the Concept B elastomer was designed to fit against the full heel protective combat boot, but can also be used with the cutaway heel. Figures 4 and 6 show the Concept B System.

---

\*Tingley Rubber Corp., South Plainfield, New Jersey



Figure 3 Concept "A" Sabot Prototype Shown Mounted  
On A DMS Protective Combat Boot



Figure 4 Concept "B" Sabot Prototype Shown Mounted  
On A DMS Protective Combat Boot





Figure 5 Pair Of Concept "A" Sabot Elastomers With Molded-In-Place Shanks Shown Less Rubber Overshoe

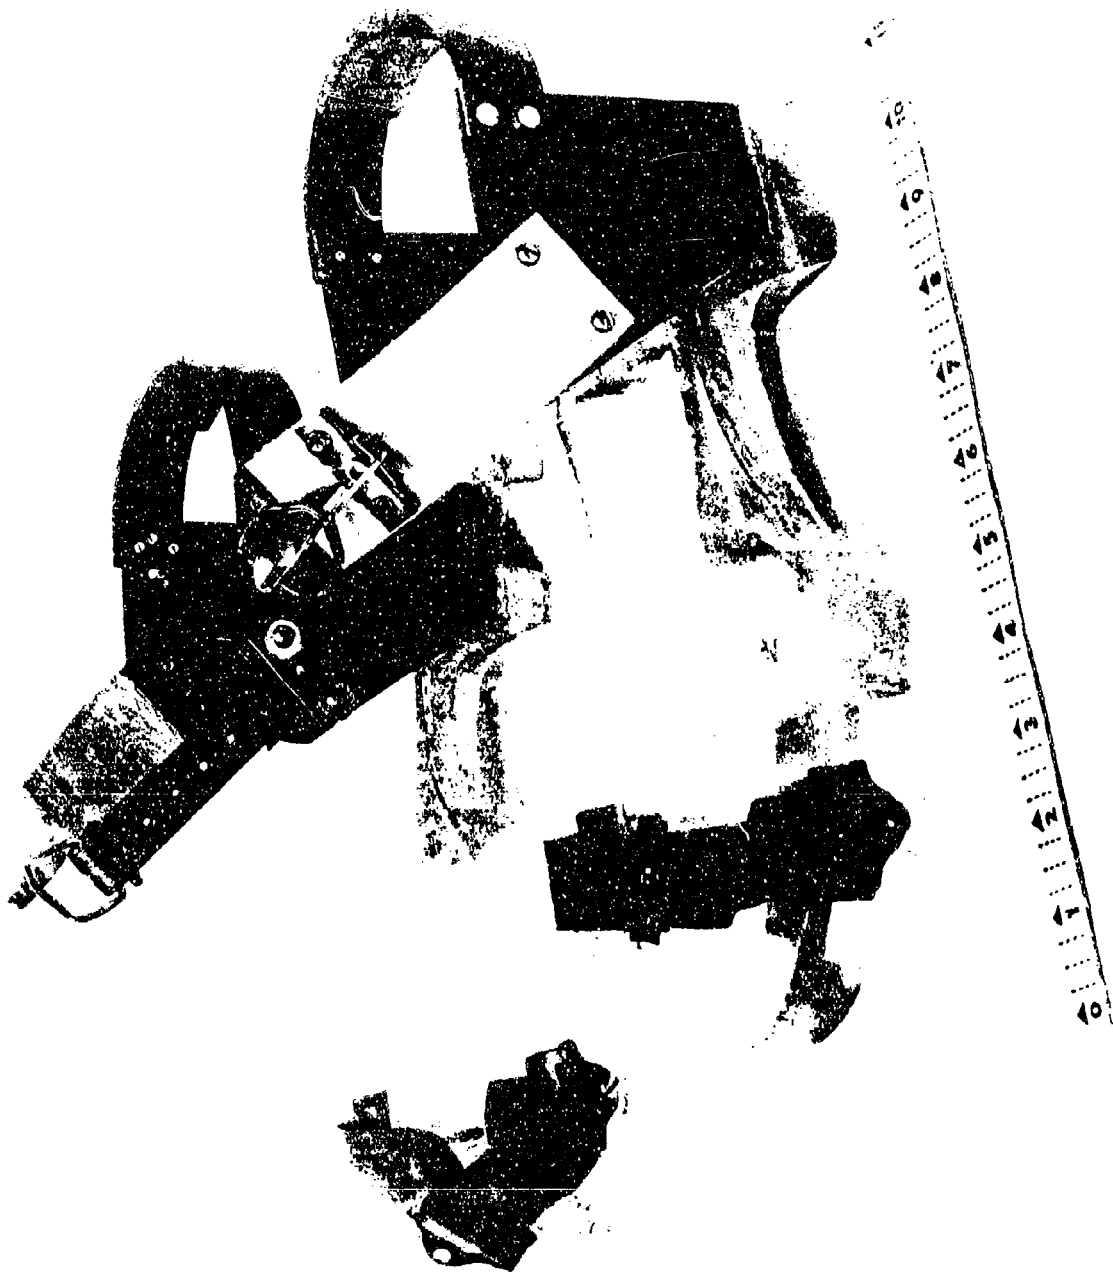


Figure 6 Pair of Concept "B" Sabot Systems Complete With  
Upper Reinforcements And Shanks



6 7 8 9 10 11 12

Figure 7 Mold For Concept "A" Sabot Elastomer (Left Foot)

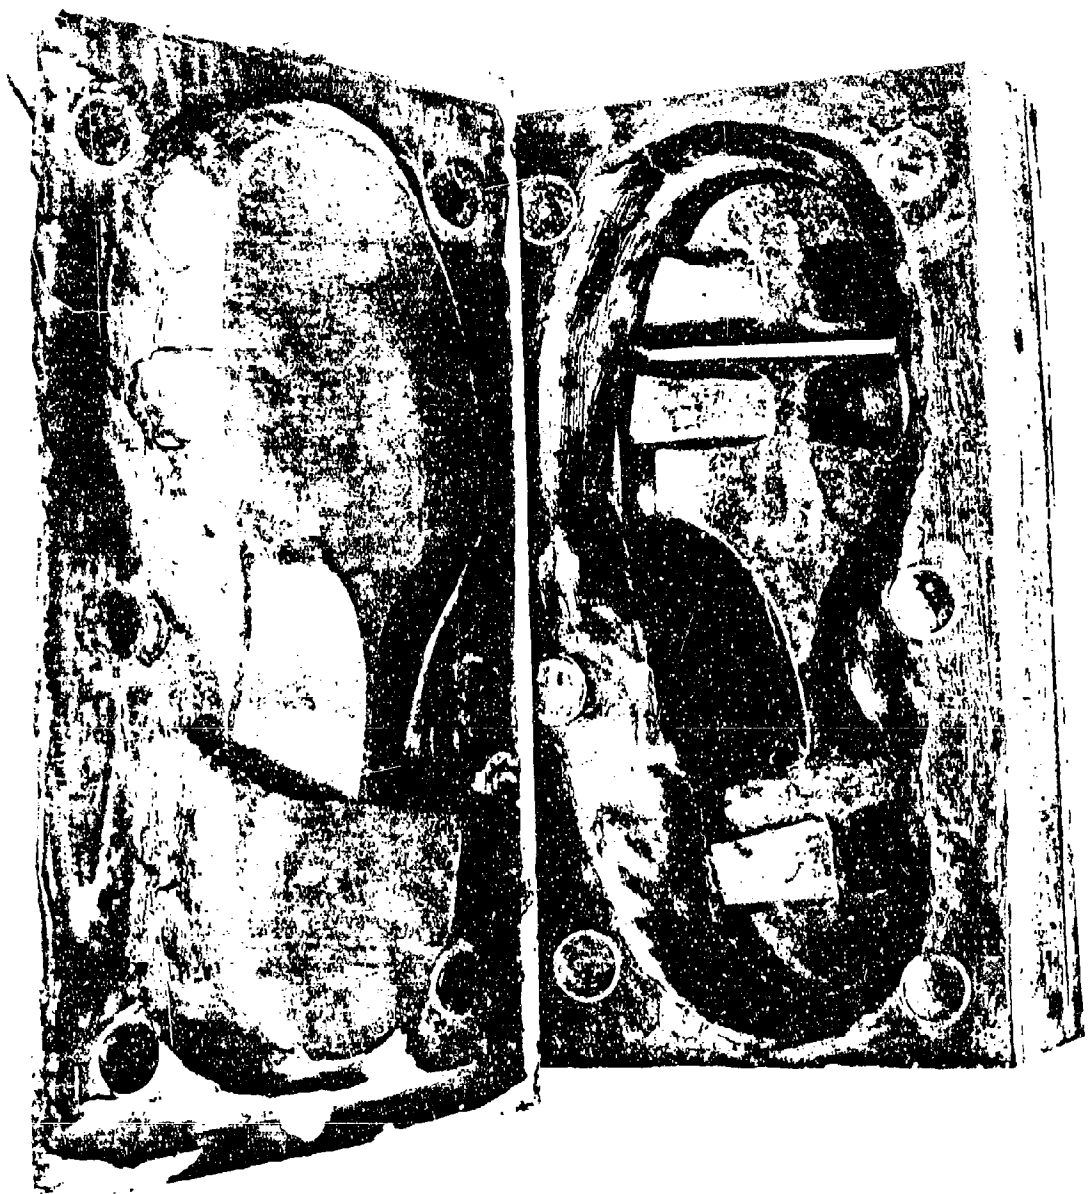



Figure 8 Mold For Concept "B" Sabot Elastomer (Left Foot)



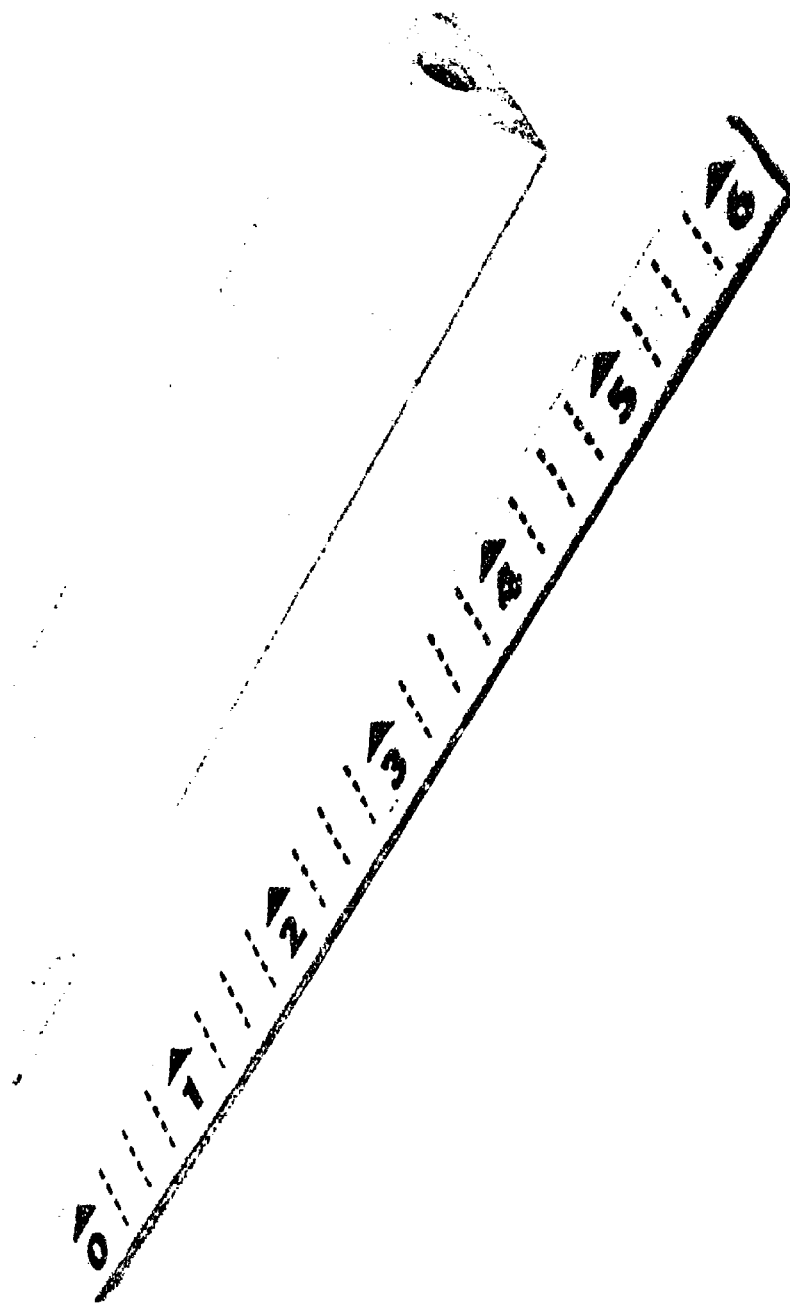


Figure 10 Aluminum Alloy 2024-T3 Sabot Shank

The upper reinforcement shown in Figure 4 is comprised of the two-piece parts shown in Figures 11 and 12. The intent of this system of upper reinforcement is to minimize the lateral expansion of the heel of the foot. These two pieces are fabricated from aluminum alloy and black-anodized.

#### PART III. PRELIMINARY PROOFTESTING CONSIDERATIONS

Final prooftesting of the sabot concepts will involve the use of cadaver lower extremities and protective combat boots as well as the sabot which is being evaluated.

A recommendation is made for the tests to be conducted at the Army Chemical Research and Development Command (CRDL) by the personnel of the Biophysics Division, Body Armor Branch. Autopsy reports, X-rays, and photographs will be supplied by CRDL to a number of experienced observers for evaluation of the damage to the cadavers, and the results will be tabulated and analyzed.

The M-14 land mine will be used and the emplacement and initiation techniques are to be similar to those established by CRDL and employed for the protective combat boot evaluation. (2)

Since the damage level will be considerably less with the sabot system than with the protective boot alone, a more detailed analysis of the damage may be useful. The primary consideration is the amputation versus possible salvage judgment; however, a breakdown similar to the one indicated in Table I may permit a more detailed picture of the damage.

The prooftesting of the 20 pair of Concepts A and B (10 pair of each type) should include a minimum of 10 tests with each type or a total of 20 tests. This amount will provide half of the lot for any retesting or preliminary walk-and-wear evaluation which may be desired.

The test program should be conducted with protective shoes that are similar to those being procured under Natick's current contract with the Genesco Company for which IITRI is under contract to furnish attenuators. This protective shoe procurement will furnish a one-piece honeycomb attenuator or boot shank and a leather counter incorporated into a combat boot of DMS construction. If tests with the more effective metal heel counter are desired, they should be in addition to the leather counter tests. The protective shoes used on these tests must be provided as Government furnished property (G.F.P.). Preliminary information indicates that an adequate supply exists from the 150 pair procurement furnished by Genesco under sub-contract with IITRI, contract number DA 19-129-QM-2061.



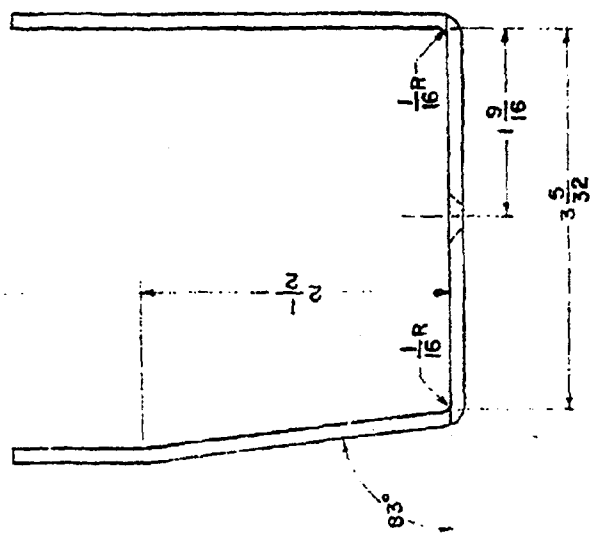


Fig. 1. (Left) (Right) (Left) (Right)  
 2044-C (Left-Right)  
 2044-C (Left-Right)

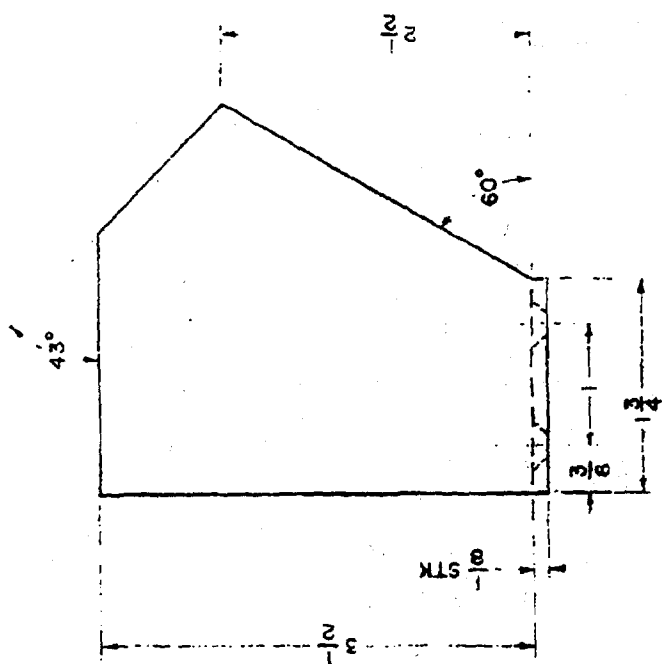

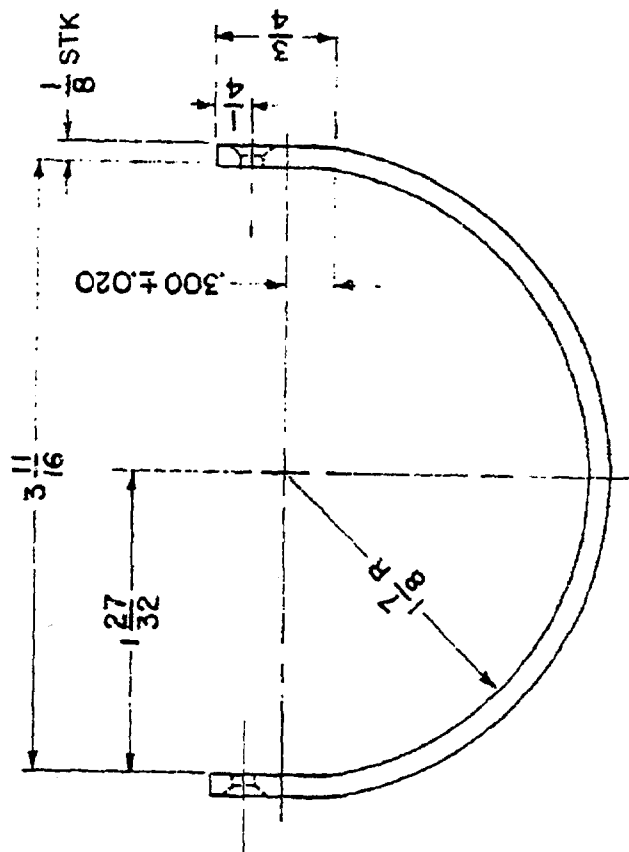

$\frac{1}{8}$  DIA DR THRU

$\frac{1}{4}$  DIA. C' SINK  
4 PLACES

$\frac{1}{2}$   $\frac{1}{4}$



Figure 12 Band For Sabot Upper Reinforcement, Aluminum Alloy 2024-T3

A discussion of the proof testing procedures with an analysis of the test results will be included in a supplement to this report. This supplement will be available within 30 days after receipt of the detailed test results from CRDL, including the evaluation of the damage to the cadaver specimens. Some delay in obtaining these evaluations may be expected since the personnel experienced in this area are not always immediately available.

## References

- 1 Fujinaka, E.S., and MacDonald, J.L., Development of Optimum Foot Protection Against Antipersonnel Mines Using a Supplementary Device, Phase I Report IITRI No. E6029-5, IIT Research Institute, Chicago, Illinois (March 15, 1966).
- 2 Fujinaka, E.S., and MacDonald, J.L., Research and Development of Blast Protective Footwear, Fabrication and Proof testing, Technical Report 67-5-CM, U.S. Army Natick Laboratories, Natick, Massachusetts (July 1966).

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R&D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)		
1. ORIGINATING ACTIVITY (Corporate author) IIT Research Institute Technology Center Chicago, Illinois 60616		2a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED
		2b. GROUP
3. REPORT TITLE Development, Fabrication and Prooftesting of Optimum Foot Protection Against Antipersonnel Mines Using A Supplementary Device		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Phase II Report		
5. AUTHOR(S) (Last name, first name, initial) MacDonald, J. L. Fujinaka, E. S.		
6. REPORT DATE December 1966	7a. TOTAL NO. OF PAGES 19	7b. NO. OF REFS 2
8a. CONTRACT OR GRANT NO. DA 19-129-QMC-379(N)		
8b. ORIGINATOR'S REPORT NUMBER(S)		
a. PROJECT NO. 1K6-43303-D547		
c.	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.	67-45-CM TS-149	
10. AVAILABILITY/LIMITATION NOTICES Each transmittal of this document outside the agencies of the U. S. Government must have prior approval of the Director, Clothing and Organic Materials Division, U. S. Army Natick Laboratories, Natick, Mass.		
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY U. S. Army Natick Laboratories Natick, Massachusetts 01760
13. ABSTRACT This report covers Phase II of a program to develop a supplementary item of protective footwear to be used in conjunction with a previously developed protective combat boot. It was directed toward fabrication of test prototypes for blast evaluation. The supplementary devices were of two types, Concept A and Concept B, both using an identical solid aluminum shank. Concept B incorporated a system of reinforcement for the upper portion of the foot.  A discussion of preliminary prooftesting considerations is presented. This discussion includes the recommendation of test personnel, the quantity of tests, and the protective footwear to be used during tests.		

DD FORM 1473

UNCLASSIFIED

Security Classification

UNCLASSIFIED

Security Classification

KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Development	8					
Testing	8					
Boots	9		8,10		7	
Combat Footwear	9		8,10		7	
Protective	0					
Armed Forces Equipment	4					
Protection	4		8			
Military Personnel	4		9			
Aluminum			8,10		7	
Shanks			8,10		7	
Blast					6	

**INSTRUCTIONS**

**1. ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.

**2a. REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

**2b. GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

**3. REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parentheses immediately following the title.

**4. DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

**5. AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

**6. REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

**7a. TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

**7b. NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

**8a. CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

**8b, 8c, & 8d. PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

**9a. ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

**9b. OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

**10. AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

**11. SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

**12. SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

**13. ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

**14. KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

UNCLASSIFIED

Security Classification

NOTICE OF CHANGES IN CLASSIFICATION,  
DISTRIBUTION AND AVAILABILITY

69-18 15 SEPTEMBER 1969

AD-813 8231  
JIT Research Inst.,  
Chicago, Ill.  
Technology Center.  
Technical rept.  
1 Feb-30 Jul 66 on  
Phase 2.  
Dec 66  
Contract DA-19-157-  
Q40-379(2)

USAR: others to  
Director, Clothing  
and Cryonic Materials  
Div., Army Natick  
Labs., Natick, Mass.

No Limitation

USANI: Mr.  
Ch. Jan 69